


## Apertura della carrozza pilota

Demontage des Steuerwagens  
Disassembling the head coach

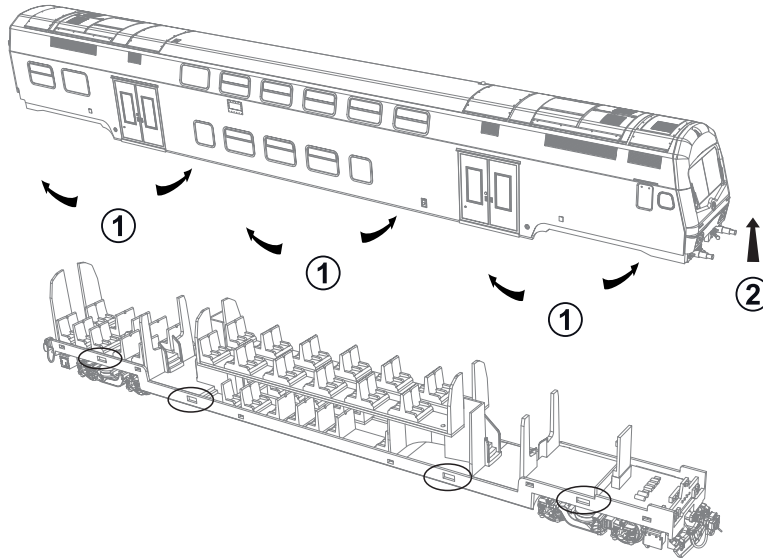


**Rimuovere la cassa della carrozza, allargandola sui lati per disimpegnare gli incastri.**

Ziehen Sie das Gehäuse nach oben ab, indem sie es seitlich vorsichtig spreizen.

Remove the bodyshell of the coach, enlarging it on the sides to disengage the side locks.

## Installazione del decoder funzioni DCC

Einbau des DCC-Funktionsdecoders  
Installation of DCC Functions Decoder

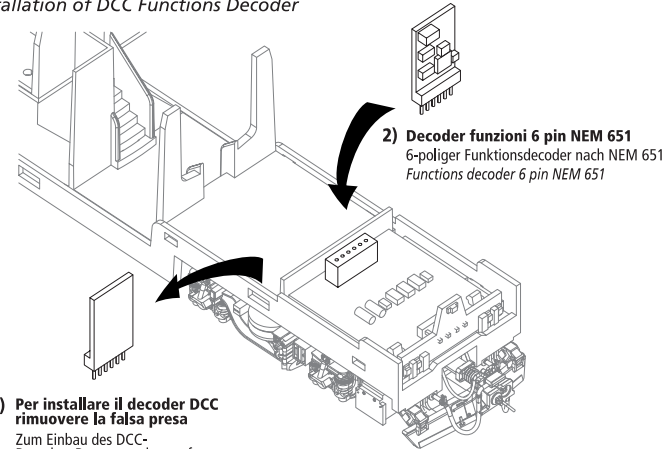

- 1) Per installare il decoder DCC rimuovere la falsa presa**  
Zum Einbau des DCC-  
Decoders Dummysstecker entfernen  
Remove dummy plug to fit  
the DCC decoder

## Circuito stampato principale

Hauptplatine  
Main PCB

