



Apertura della carrozza pilota Demontage des Steuerwagens Disassembling the head coach

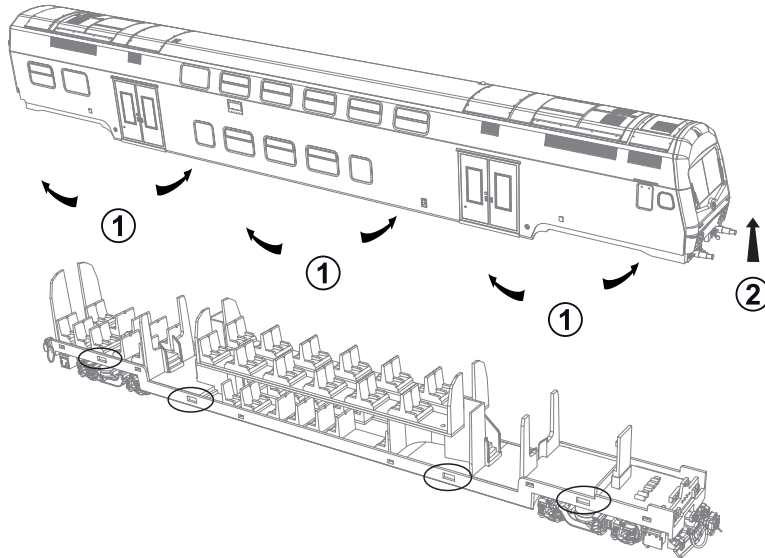

Rimuovere la cassa della carrozza, allargandola sui lati per disimpegnare gli incastri.
Ziehen das Gehäuse nach oben ab, indem sie es seitlich vorsichtig spreizen.
Remove the bodyshell of the coach, enlarging it on the sides to disengage the side locks.

FS, Carrozze "Vivalto"

Installazione del decoder funzioni DCC Einbau des DCC-Funktionsdecoders Installation of DCC Functions Decoder

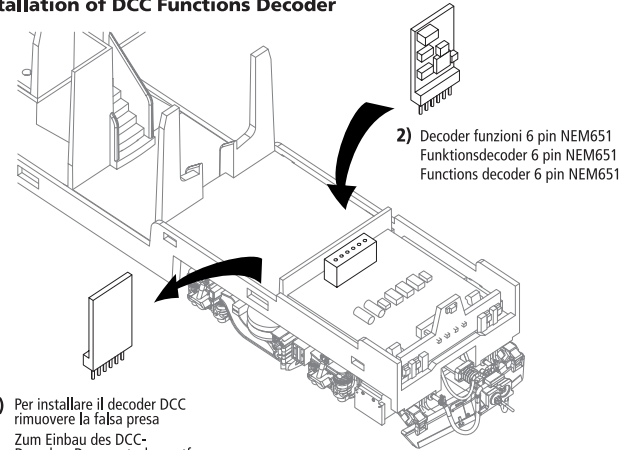

- 1) Per installare il decoder DCC rimuovere la falsa presa
Zum Einbau des DCC-
Decoders Dummystecker entfernen
Remove dummy plug to fit
the DCC decoder

Circuito stampato principale Hauptplatine Main PCB

